

# FIGHTER BUILT READY 10 PALLET CURTAINSIDER 4X2 / AUTO OR MANUAL / STEEL SUSP

GVM

**10,400KG -  
11,000KG**

GCM

**15,000KG -  
16,000KG**

Power/Torque

**177KW/745NM**

Medium rigid licence required.



**10 PALLET CAPACITY  
CLASS LEADING 30,000KM SERVICE INTERVALS**

fuso.com.au

**FUSO**

# SPECIFICATIONS

## MODEL

<b>A</b>	4x2 1024 Built Ready 10 Pallet Curtainsider Trans. Park Brake LWB 6 Sp. Manual (FK61FL1RFAG-B04)
<b>B</b>	4x2 1124 Built Ready 10 Pallet Curtainsider Rear Wheel Park Brake LWB Allison 5 Sp. Auto (FK62FLY1RFAL-B04)

## WHEEL BASE

5210mm
5210mm

## GVM


10,400kg
11,000kg

## GCM

16,000kg
15,000kg

## ENGINE

Engine Version	FUSO 6M60-9AT1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7545cc)
Bore	118mm
Stroke	115mm
Power (ECE R85-00)	177kW @ 2500 rpm
Torque (ECE R85-00)	745Nm @ 1400 rpm
Maximum Engine Speed	2900 rpm
Compression Ratio	16.0:1
Cooling System / Oil Cooler	Water cooled, 23.0L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Selective Catalytic Reduction (SCR) after-treatment system (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	ADR 80/03 - Euro 5

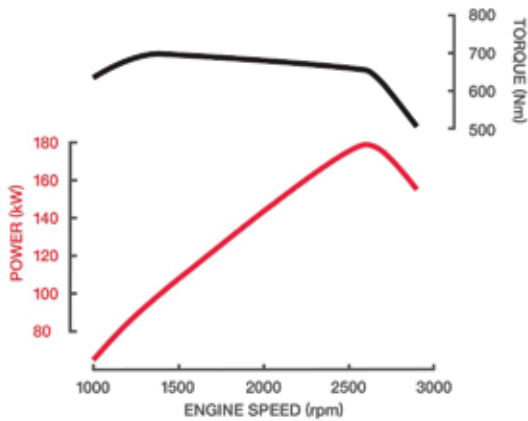

## FUEL

Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	200 Litres
AdBlue Exhaust Fluid Capacity	22 Litres
Notes	*Max Fill to approx 95% of Air Capacity

## COOLING

Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

## ELECTRICAL

Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Starter Capacity	24V-5.0kW
Battery Capacity	2x12V, 65Ah/5hr
Headlamp Type	Halogen
Headlamp Capacity	Low Beam 2x70W High Beam 2x75W

## CLUTCH

	<b>A</b>	<b>B</b>
Clutch Model	FUSO C7M38	N/A
Type	Single Dry Plate	N/A
Operation/Specification	Air Assisted Hydraulic	N/A

## TRANSMISSION

Version	<b>A</b> FUSO Manual M060S6-OD	<b>B</b> Allison Automatic 2500 Series
Type/Speeds	<b>A</b> 6 with Air Assisted Gearshift	<b>B</b> 5 Speed
Features	<b>A</b> Synchronesh 2nd-6th	<b>B</b> Generation 5 Control Systems
Ratios	<b>A</b> 1st: 6.748 2nd: 4.112 3rd: 2.415 4th: 1.514 5th: 1.000 6th: 0.731 Rev. 6.748	<b>B</b> 1st: 3.512 2nd: 1.896 3rd: 1.439 4th: 1.000 5th: 0.737 Rev. 5.086
Torque Converter/Stall Torque Ratio	<b>A</b> N/A	<b>B</b> TC222/1.58
PTO Opening	<b>A</b> LH Side	<b>B</b> LH & RH Side
Automatic Transmission Fluid Cooling	Cooler mounted in front of radiator	

## PROPELLER SHAFT

Type	P8
Universal Joint	Needle Roller

## FRONT AXLE

Axle Version	<b>A</b> FUSO F400T	<b>B</b> FUSO F500T
Type	<b>A</b> Reverse Elliot 'I' Beam	<b>B</b> Reverse Elliot 'I' Beam
Capacity *	<b>A</b> 3800kg	<b>B</b> 5000kg
Notes	*See MAX LOADING for vehicle capacity.	

## FRONT SUSPENSION

Type	Parabolic Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size	1300x70mm Leaves

## REAR AXLE

Type	Full Floating Hypoid	
Axle Version	<b>A</b> FUSO R050T/D050H	<b>B</b> FUSO R052T/D052H
Capacity*	<b>A</b> 7800kg	<b>B</b> 9500kg
Ratio	<b>A</b> 4.625:1	<b>B</b> 4.875:1
Notes	*See MAX LOADING for vehicle capacity.	

## REAR SUSPENSION

Type	Steel Suspension
Details	Semi-Elliptic Leaf with Stabiliser Bar
Size Main Leaves	1300x70mm
Size Helper Leaves	900x70mm

## MAX LOADING

Front	<b>A</b> 3600kg	<b>B</b> 4480kg
Rear	<b>A</b> 6800kg	<b>B</b> 8480kg
Total	<b>A</b> 10400kg	<b>B</b> 11000kg

# SPECIFICATIONS

## MODEL

<b>A</b>	4x2 1024 Built Ready 10 Pallet Curtainsider Trans. Park Brake LWB 6 Sp. Manual (FK61FL1RFAG-B04)
<b>B</b>	4x2 1124 Built Ready 10 Pallet Curtainsider Rear Wheel Park Brake LWB Allison 5 Sp. Auto (FK62FLY1RFAL-B04)

## WHEEL BASE

5210mm

5210mm

## GVM

10,400kg

11,000kg

## GCM

16,000kg

15,000kg

### STEERING

Type	Integral Power Assisted Ball and Nut	
Steering Column	Tilt/Telescopic Adjustable with Lock	
Ratio	17.1~20.0:1	

### BRAKES

Type	<b>A</b> Air Actuated Hydraulic Dual Circuit ABS with Automatic Brake Adjustment	<b>B</b> Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake adjustment, ABS
Size Front	<b>A</b> 320x120mm	<b>B</b> 370x150mm
Size Rear	<b>A</b> 320x140mm	<b>B</b> 370x150mm
Park Brake	<b>A</b> Transmission Mounted	<b>B</b> Rear Wheel Spring Actuated
Auxiliary Compressor	Exhaust Brake Water Cooled, 340cc Single Cyl.	
Air Dryer Model	<b>A</b> DU3	<b>B</b> DU5

### WHEELS & TYRES

Wheel Type	<b>A</b> 7, Single Piece Disc	<b>B</b> 8, Single Piece Steel Disc (Including Spare)
Wheel Size	<b>A</b> 17.5x6.0-135-9t	<b>B</b> 19.5x6.75DC-147-12t
Wheel Stud Pattern	<b>A</b> 6x222.25mm PCD	<b>B</b> 8x275mm PCD
Tyre Size All	<b>A</b> 9.5R17.5 129/127	<b>B</b> 245/70R19.5 136/134
Spare Tyre Carrier	Provided	

### CHASSIS

Type	Parallel Channel
Size	228x80x7.0mm
Width	842mm
Tensile Strength	540Mpa

### INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Air Pressure (2) Fuel Level Water Temperature
Colour Information Display	Fuel Consumption Service Indicators Hour Meter and Tripmeter
Warning Lamps	ABS Turn Signal High Beam Exhaust Brake Oil Level Ad Blue Low Fuel Low Park Brake Alternator Oil Filter Blockage Engine Control / Cruise Control (ECU) Air Filter Restriction Fuel Filter Water Contamination Door Opening
Warning Lamp/Buzzer	Air Pressure Brake Fluid Level / Dual Circuit Oil Pressure Engine Overheat / Low Coolant Level

### MULTI-MEDIA PACKAGE

Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	6.1 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	CD/DVD player and Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB port for iPod®* & other devices
Reversing Camera Compatible	1 Reverse Camera fitted as standard Display can accept up to 2 additional cameras#
Notes	* iPod® compatibility requires an additional licensed cable # Cameras available through spare parts

### STANDARD FEATURES

Airbag(s)	Driver's Air Bag and Seat Belt Pre-tensioners	
Hill Start System	<b>A</b> Yes	<b>B</b> No
Cab Cooling & Heating	Air Conditioner / Heater / Demister	
Accessory Power	24V Accessory Power Outlet / Cigar Lighter	
Driving	<b>A</b> Keyless Central Locking Electric Windows Cruise Control LH Transom Window Fuso Multimedia Unit Cup Holders (4) Rear Quarter Glass Fluorescent Cabin Lamp and Interior Reading Lamps Engine Idle Speed Control	<b>B</b> Keyless Central Locking Electric Windows Cruise Control LH Transom Window Fuso Multimedia Unit Cup Holders (4) Rear Quarter Glass Fluorescent Cabin Lamp and Interior Reading Lamps Engine Idle Speed Control
Storage	<b>A</b> Centre Seat Storage Console Rear Bunk Storage Pocket Dash Storage Tray 2 DIN Glove Compartment 1 Single & 1 Double DIN Slot for Accessories Overhead Storage Pocket with Lid RH Door Storage Pocket	<b>B</b> Centre Seat Storage Console Rear Bunk Storage Pocket Dash Storage Tray 2 DIN Glove Compartment 1 Single & 1 Double DIN Slot for Accessories Overhead Storage Pocket with Lid RH Door Storage Pocket
Cab: External	Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps	
Chassis	Chassis Mounted Tool Box Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup	

### CAB FEATURES

Type	All Steel Forward Control Manual Tilt 44 deg.
Mounting	Hydroelastic Susp. 4 Point
Colour	Natural White
Interior	Fully Trimmed
Windscreen	Laminated Tinted
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door	90 degree Opening Angle
Rear Vision Mirrors	Remote / Heated with Convex Spotter (Both sides)
Seating Capacity	3
Seat Belts	2 ELR Lap Sash, 1 Lap
Seat (driver)	ISRI Air Suspension with Height, Tilt and Dampening Adjustment Integral Headrest and Fabric Trim
Seats (passenger)	Centre: Low Back with Fabric Trim Forward Folding Far Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim

# SPECIFICATIONS

## MODEL

<b>A</b>	4x2 1024 Built Ready 10 Pallet Curtainsider Trans. Park Brake LWB 6 Sp. Manual (FK61FL1RFAG-B04)
<b>B</b>	4x2 1124 Built Ready 10 Pallet Curtainsider Rear Wheel Park Brake LWB Allison 5 Sp. Auto (FK62FLY1RFAL-B04)

## WHEEL BASE

5210mm

5210mm

## GVM

10,400kg

11,000kg

## GCM

16,000kg

15,000kg

## SERVICE INTERVALS

Interval*	30,000km or 12 Months (whichever occurs first)
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

## WARRANTY

Basic/Powertrain	5 Years or 300,000km (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years

## PERFORMANCE

Turning Circle (kerb to kerb - metres)	<b>A</b> 16.6	<b>B</b> 18.2
Road Speed (km/h) at Max Engine Speed	<b>A</b> 131	<b>B</b> 123
Engine Speed (rpm) at 100km/hr (top gear)	<b>A</b> 2191	<b>B</b> 2273
Gradeability at Rated GVM (theoretical)*	<b>A</b> 55%	<b>B</b> 39%
Gradeability at Rated GCM (theoretical)*	<b>A</b> 32%	<b>B</b> 27%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions	

## MASS (ESTIMATED)\*

Front*	<b>A</b> 2710kg	<b>B</b> 2750kg
Rear*	<b>A</b> 2960kg	<b>B</b> 3155kg
Total*	<b>A</b> 5670kg	<b>B</b> 5905kg
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)	

## DIMENSIONS (MM)

Width Front Fender (mm)	2170	
Width Rear Axle (mm)	<b>A</b> 2175	<b>B</b> 2255
Width Front Track (mm)	<b>A</b> 1810	<b>B</b> 1780
Width Rear Track (mm)	<b>A</b> 1665	<b>B</b> 1710
Width Frame (mm)	842	

## BUILT READY

Length (mm)	6500
Width (mm)	2490
Height (mm)	2515
Overall Unit Length (mm)	8779
Features	<ul style="list-style-type: none"> <li>• 2440mm Side Opening</li> <li>• 3mm Steel Chequerplate Floor (Exposed Chequer Up)</li> <li>• Aluminum One Piece Skin and Roof Structure with Incorporated Curtain Track</li> <li>• 2 Piece Colourbond White Clad Front Wall</li> <li>• Double Rear FRP Doors (Kerb Side Opening First)</li> <li>• 6 x Lift Out Hanging Gates</li> <li>• White Curtains with Black Pelment</li> <li>• Quick Release Stainless Steel Buckles (every 500mm)</li> <li>• 5 x Ratcheting Load Binders in Sliding Track</li> <li>• Front and Rear Steps</li> <li>• Front and Rear Curtain Tensioners</li> <li>• Interior Light with Switch in Cabin</li> <li>• Rear Grab Handles</li> <li>• White Nose Cone / Wind Deflector</li> </ul>



# FUSO

## CALL 1300 429 134

or visit [fuso.com.au](http://fuso.com.au)

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this document are for illustration purposes only and may not be available from Daimler Truck and Bus Australia Pacific Pty Ltd. (ABN 86 618 413 282) (DTB). No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTB. DTB reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTB please contact your authorised FUSO Truck and Bus dealer. Fuso is a registered trademark of Daimler Truck and Bus Australia Pacific Pty Ltd. Copyright DTB. Reproduction in whole or part prohibited without written approval. Part Number TSX40A-SSV1. Valid from 21-Sep-18.